

The **NSKT automatic sealing machine** performs the film sealing operation on a preformed plastic tray.

The **NSKT-ATM** model is equipped

with an optional device that allows to enclose the product in a **modified atmosphere**, to ensure the maximum conservation, with possibility to vacuum seal or insert technical gas.

Standard equipment:

- automatic moving device for trays slot;
- adjustable feet;
- date/lot marking device;
- innovative system:
 - film stretching control;
 - take-up reel rapid lock;
 - film waste rapid extraction;
 - sealed tray rapid extraction.



NSKT automatic sealing machine: product output.

Main features:

- 1. Construction toughness:** structure made in tubular and AISI 304/316L steel panels.
- 2. Quality:** the best components in the market ELAU, SIEMENS, FESTO, ...
- 3. Versatility of use:** from industry to the small food laboratory.
- 4. Ease of use:** just put the product in the tray, NSKT will seal it.
- 5. Ease of work:** an innovative system allows to easily insert and withdraw the trays, as well as the reel and the film waste.
- 6. Ease of management:** no maintenance, easy to clean, attainable in all its parts.
- 7. Production flexibility:** size change in a few minutes, storable data and programmable functions directly from the operator panel.
- 8. Tray positioning:** electronic, programmable.
- 9. Interchangeability:** easy replacement of the sealing heads.
- 10. Savings on consumables:** thanks to the careful design, NSKT provides high savings in the consumption of film, air, technical gas, electricity.

Optional features:

- heads trolley;
- height and width special containers adjustment;
- air or gas tank (when required);
- date/lot marking device;
- powered vacuum pump (when required);
- interchangeable heads;
- film centering photocell (when necessary).

sealing machine
NSKT



NSKT automatic sealing machine: reel detail.



flexible packaging


NSKT automatic sealing machine for preformed rigid plastic trays

	NSKT/400	NSKT/ATM
trays maximum height	60 mm	60 mm
machine sizes (mm)	3000 x 900 x 1700 (h)	3000 x 900 x 1700 (h)
estimated production	500 cycles/h	240 cycles/h
vacuum pump	-	100 m ³ /h max
max power	1KW – 380V 3P+N+T	3KW – 380V 3P+N+T
wheight	300 Kg	400 Kg

0515

design Parentesi Graffia | r.cardinale@pgraffia.com

NSKT automatic sealing machine

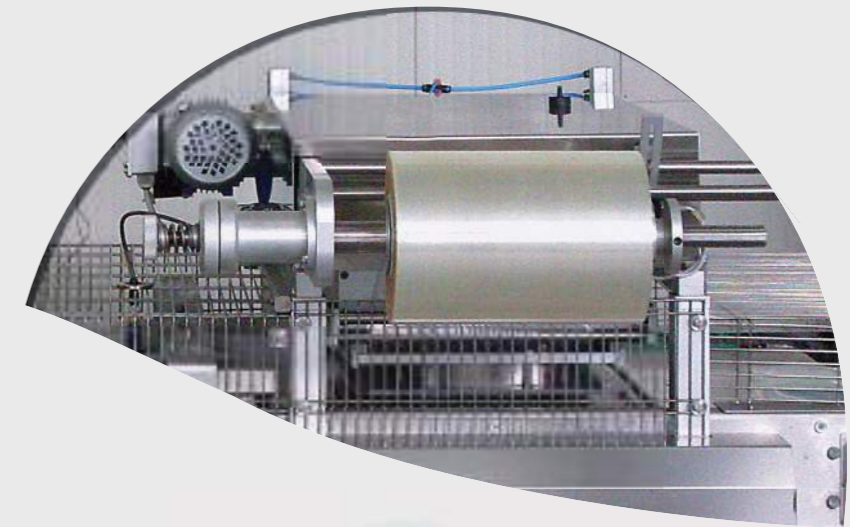

bianco
engineering FDM

bianco spa
engineering division

Viale Industria 4
12051 Alba (CN)
ITALIA
T +39 0173 31 41 11
F +39 0173 34 872
eng@bianco-spa.com
www.bianco-spa.com

The specifications, data and drawings contained herein are purely indicative.

bianco
engineering FDM

flexible packaging